

fall  
protection  
only

neofeu )



by PMS GROUP  
FABRICANT FRANÇAIS



2021  
NEWS



# Pack&G'O

full body harness with integrated bag

MAX  
140 KG  
\*

PATENTED PRODUCT  
PATENTED

LIFE  
10  
YEARS  
SPAN



## INNOVATION


The reversible bag

- The **Pack&G'O** is ready to use instantly: the harness is ready to be put on right after the bag is turned over.
- The bag is easy to store and transport. Made of flexible elastane fabric, it protects the equipment.




## FULL BODY HARNESS 2 POINTS

removable lanyard holder



shoulder straps adjustment pulling downwards

patented anti-trauma buckles

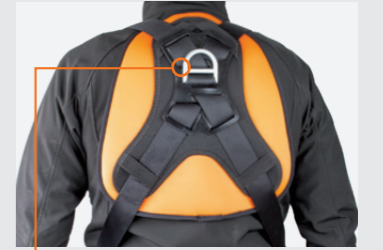

back and front fall arrest attachment point



automatic buckles with locking indicator

EN 361

## PACK&G'O / NUS57P

**Pack&G'O** is a full body harness with an integrated transport bag. It offers to the user a better comfort and allows its quick storage. this harness includes 2 fall arrest attachment points: 1 in the front with textile loop and 1 in the back with metallic D ring.

**Pack&G'O** is an innovative harness with its anti trauma buckles on legs which reduces the arrest force in case of a fall. It is fitted with automatic buckles on chest and legs straps. Available in 3 sizes it can be easily adjusted by pulling downwards the shoulder straps through the quick buckles.

MAX  
140 KG  
\*

PATENTED PRODUCT  
PATENTED

LIFE  
10  
YEARS  
SPAN

sizes **S** **M-L** **XL**

REF: **NUS57P** Pack&G'O harness with integrated bag PAD

EN 361

## NUS57

The **NUS57** is a single harness version of the Pack&G'O, without its integrated transport bag. However, it keeps the same technical specifications.

sizes **S** **M-L** **XL**

REF: **NUS57** Pack&G'O harness without bag



\*Weight included user, his tools and material. As far as it is associated with fall arrest device tested to 140kg (see user manual)

arb'o  
tree climbing belt



MAX  
140 KG  
LIFE  
10 YEARS  
SPAN



FIND ALL OF OUR  
TREE CLIMBING RANGE  
IN A DEDICATED BROCHURE

## COMFORT WITHOUT COMPROMISE !

350mm and 450mm double suspension bridge equipped with aluminum rings


automatic aluminum buckles



large positioning belt with breathable 3D fabric




triangulation quick adjustment

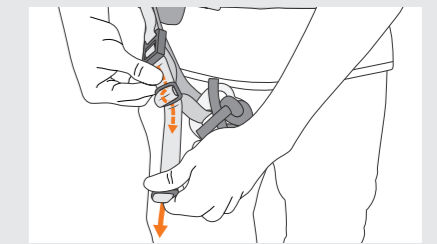


## STANDARDS

EN 358

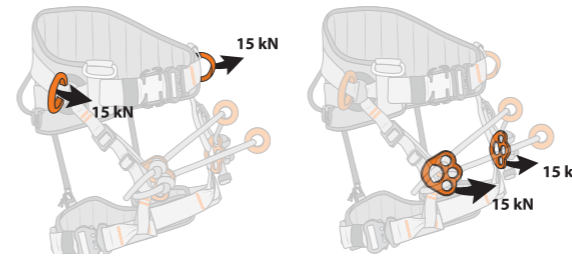

EN 813

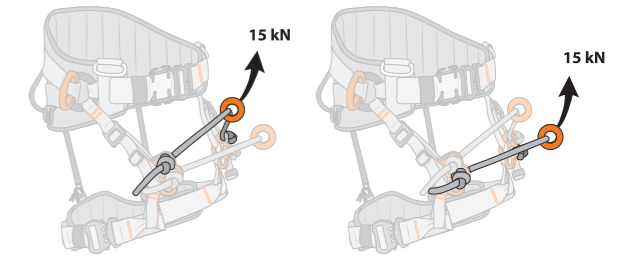

## ARB'O / NELUS150

ARB'O is a seat belt for work positioning especially designed for tree climbing. The belt and legs straps integrate a semi-rigid large and breathable pad, made of 3D fabric which improve its comfort. ARB'O is easy to adjust to fit the user with its quick adjustment systems and aluminum automatic buckles. The adjustable elastic webbing connecting the leg straps to the belt facilitates the user ascent on rope. The double bridge in polyamide rope equipped with aluminum rings, can be easily adjusted and replaced through specific knots. The side anchor plate allows not only to connect the double bridge but to connect the work positioning lanyard fitted with an ERG'O type rope adjuster. The ARB'O tree climbing belt is also equipped with many loops and tool-holders to carry your working tools and accessories.

sizes **S** | **M-L** | **XL**

REF. **NELUS150**  
Accessories

ARB'O tree climbing belt  
See dedicated brochure

included



double bridge in aramid included (without rings)



1m of spare elastic straps to attach first aid kit


# NCE4

removable work positioning belt

MAX  
140 KG  
LIFE  
10  
YEARS  
SPAN



## MOUNTING THE BELT ON THE HARNESS WITH VELCRO TAPE

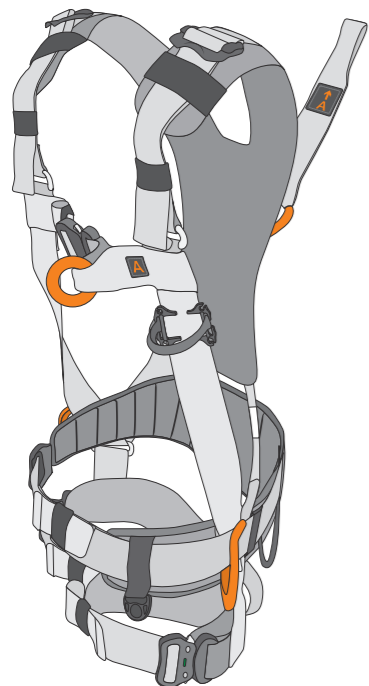

EN 358

+ **REMOVABLE BELT**  
CAN BE ADDED TO THE HARNESS

### NCE4

**NCE4** belt is designed for all types of work either restraint or work positioning. This belt allows the user to rotate while the work positioning lanyard hold in place. It can also be added to a fullbody harness whenever its design is adapted for.

sizes **S** **M-L** **XL**

REF. | **NCE4** Work positioning belt

EN 361 EN 1497 EN 358

+ **NON REMOVABLE**  
BELT IS BUILT INSIDE THE HARNESS

### VIT'O + NCE4

Full body harness **VIT'O** comfortable lightweight and safe, fits most of the bodies thanks to its high performance adjusting and locking systems. With the integrated belt, the **VIT'O** harness is the most complete and versatile products of its range. It suits to any types of work at height, by combining performance and comfort. The **NUS87C** models are equipped with shoulder elastic straps for better comfort.

sizes **S** **M-L** **XL**

REF. | **NUS77C** VIT'O harness with work positioning belt  
**NUS77CP** With comfort back pad  
**NUS77CEX** With extension strap  
**NUS77CEXP** With comfort back pad and extension strap  
**NUS87C** VIT'O elastic harness with work positioning belt  
**NUS87CP** With comfort back pad  
**NUS87CEX** With extension strap  
**NUS87CEXP** With comfort back pad and extension strap



ultra fast adjustment harness

## Quick adjustment with one simple action...

Pull on both lateral loops, the harness is ready for use.



PATENTED PRODUCT  
PATENTED  
PATENTED PRODUCT

LIFE  
10  
YEARS  
SPAN

MAX  
140 KG

ANTI-STRANGULATION  
SAFETY

EN 361

### IZI EVO

**Ultra-fast adjustment** with 2 adjustment loops (Patented System).  
**Safety** : Side loops eliminate the strangling effect (Patented System).  
**Simplified periodic inspection** : designed with only 2 safety seams.  
**One size fits all** : the harness is easy to adjust and fits all sizes.  
**Vertically adjustable sternal attachment point** (IZI EVO 2 only).

REF. | **EVOIZI2** Model with 2 attachment points  
**EVOIZI2BC** IZI EVO 2 in cardboard box  
**EVOIZI1** Model with 1 attachment point  
**EVOIZI1BC** IZI EVO 1 in cardboard box

size **U**



1 Put the harness on

2 Quick Adjustment

3 Ready to use



Packaging in cardboard box available



The KTP harnesses offered by NEOFEU are unique on the market: the bag, the harness and the lanyard cannot be dismantled. They provide a complete fall protection system, ready to use.


KTP EVO is the enhanced version of the KTP range with better comfort and automatic buckles with locking indicator...

## READY TO USE

- The reversible bag
- The KTP EVO is usable instantly: the harness is ready to be put on right after the bag is turned over.
  - The bag is easy to store and transport. Made of flexible elastane fabric, it protects the equipment.



- How to choose your harness ?
- There are 2 types of personal protective equipments :
- fall arrest systems : **FALL ARREST**
  - systems to limit the access to a danger zone : **RESTRAINT**

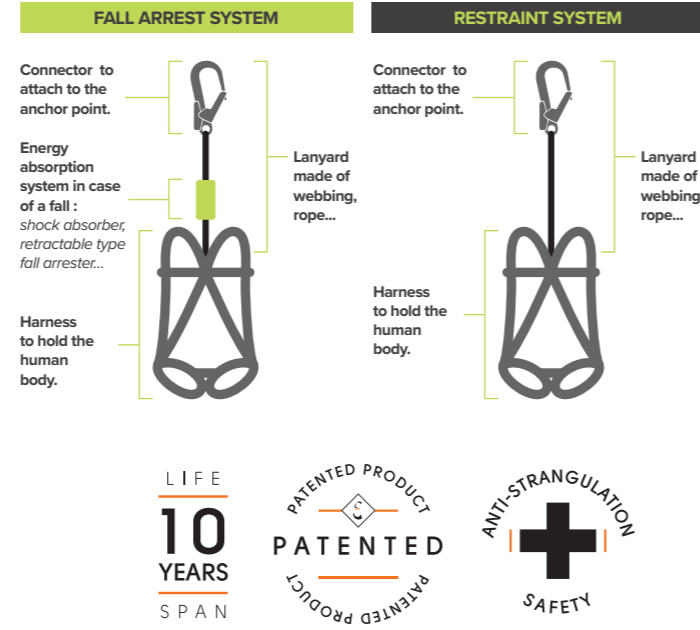

## TRADE SYMBOLS

	Weight	Welder	Water distribution	Mason	Industrial maintenance	Carpenter, roofer	Antenna, air-conditioning	Facade specialist	Metal construction	Weather-proofer	Joiner, blind provider	Chimney sweep	Cherry picker	Scaffolder	Bridge maintenance	Crane operator
KTP EVO 2	2,75 kg				•											
KTP EVO 4	2,25 kg				•											
KTP EVO 6	4,15 kg		•													
KTP EVO 9	4,44 kg	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
KTP EVO 11	2,93 kg															

## A TREMENDOUS EFFICIENCY

Removable and sliding tool holder loops for hands-free work.

Quick adjustment buckles for straps to adjust the length of the harness.

Patented anti-trauma buckles

Automatic quick lock steel buckles with locking indicator: safety at a glance. They are positioned at strategic points to ensure a quick set up: shoulder straps and legs adjustment.

Lock indicator

Opening ears

## 5 DESIGNS SUITABLE FOR ANY ACTIVITIES

<p><b>FALL ARREST</b></p> <p><b>KTP EVO 2</b> COMPLYING WITH EN361, EN355 Shock absorber with integrated webbing lanyard 2m. Aluminum connector large opening 60 mm. ref. <b>KTPEVO2</b></p>	<p><b>FALL ARREST</b></p> <p><b>KTP EVO 4</b> COMPLYING WITH EN361, EN355 1m Elastic lanyard with integrated shock absorber. (2m max extended). Aluminum connector large opening 60 mm. ref. <b>KTPEVO4</b></p>	<p><b>FALL ARREST</b></p> <p><b>KTP EVO 6</b> COMPLYING WITH EN361, EN355 Shock absorber with integrated double webbing lanyard 2m. Aluminum connector large opening 60 mm. ref. <b>KTPEVO6</b></p>	<p><b>FALL ARREST</b></p> <p><b>KTP EVO 9</b> COMPLYING WITH EN361, EN360 Retractable type fall arrester with webbing wide 25mm and total length 2,5m. <i>The retractable type fall arrester with its aluminum housing is lightweight and compact</i> Aluminum connector large opening 60 mm. ref. <b>KTPEVO9</b></p>	<p><b>RESTRAINT</b></p> <p><b>KTP EVO 11</b> COMPLYING WITH EN361, EN354 1m Single webbing lanyard (up to 1,5 m available). Aluminum connector large opening 60 mm. <i>Restraint system.</i> ref. <b>KTPEVO11</b></p>
--	---	---	---	---

# NEW ABS'O RANGE

LIFE  
**10**  
YEARS  
SPAN



3<sup>rd</sup> quarter 2021



## EDGE / NHEA10 NHEYA10

MAX  
**140 KG**

TESTED FOR USE  
UP TO 140 KG

R ≥ 0.5

TESTED IN  
HORIZONTAL USE

+ COMPACT  
DESIGN

EN 355 RfU 11.062 / 11.074

Shock absorber with integrated single or double elastic webbing lanyard (Y model). Extended length **1 m** without connector. Compatible in a **horizontal use** for a maximum load up to **140kg** (user + equipment).

A removable connector on energy absorber side and a removable or irremovable connector on the lanyard side.

The shock absorber is protected with a polyester pouch.

Available with or without connectors.

REF: NHEA10AC Elastic webbing lanyard 1m + 1 steel screw gate connector + 1 aluminum connector large opening  
NHEYA10AC Y Elastic webbing lanyard 1m + 1 steel screw gate connector + 2 aluminum connectors large opening

Other connectors available

## NEA13 / 17 NEYA13 / 17

+ COMPACT  
DESIGN

EN 355

Shock absorber with integrated single or double elastic webbing lanyard (Y model). Extended length **1m3** or **1m7** without connector. A removable connector on energy absorber side and a removable or irremovable connector on the lanyard side.

The shock absorber is protected with a polyester pouch.

Available with or without connectors.

REF: NEA13AC Elastic webbing lanyard 1m3 + 1 steel screw gate connector + 1 aluminum connector large opening  
NEYA13AC Y Elastic webbing lanyard 1m3 + 1 steel screw gate connector + 2 aluminum connectors large opening  
NEA17AC Elastic webbing lanyard 1m7 + 1 steel screw gate connector + 1 aluminum connector large opening  
NEYA17AC Y Elastic webbing lanyard 1m7 + 1 steel screw gate connector + 2 aluminum connectors large opening

Other connectors available



## CHOOSE YOUR LANYARD


1 connector on  
absorber side +

shock absorber with  
integrated elastic webbing +


connectors on  
lanyard side



NM16NS



NHEA / NEA

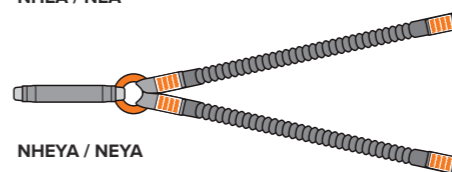

NHEYA / NEYA



NM16NS



NM28N



NM24N

other connectors on request

## A COMPACT DESIGN

For a 1 m length lanyard, the elastic webbing lanyard is **40% shorter** when retracted than a standard webbing lanyard.


This increases your comfort while moving at work.

Standard webbing lanyard 1m



NHDA / NDAT

Elastic webbing lanyard 1m when extended



NHEA / NEA

## NEW ERG'O LANYARD

work positioning lanyard

MAX  
**140 KG**

LIFE  
**10**  
YEARS  
SPAN




EN 358

## ERG'O

ERG'O is a work positioning lanyard in polyamide braided rope Ø12 mm. Fitted with an ergonomic rope adjuster in light alloy and a protective sleeve, the lanyard is equipped with triple lock connectors (according to ref).

+ LENGTH  
ADJUSTMENT

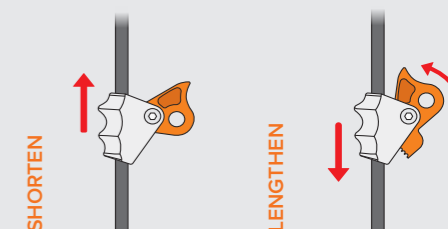

REF: NLR20MV Work positioning lanyard 2 m + 2 aluminum triple lock connectors  
NLR30MV Work positioning lanyard 3 m + 2 aluminum triple lock connectors  
NLR40MV Work positioning lanyard 4 m + 2 aluminum triple lock connectors  
NLR20AD Work positioning lanyard 2 m + 2 steel connectors  
NLR30AD Work positioning lanyard 3 m + 2 steel connectors  
NLR40AD Work positioning lanyard 4 m + 2 steel connectors

Other connectors on request.

4<sup>th</sup> quarter 2021



**ASC'O / NSD19**

MAX  
**140 KG**  
TESTED FOR USE  
UP TO 140 KG

**ASC'O** is a mobile fall arrester in aluminum to use on **TWIST 11** rope to secure your works at height. In normal use, the device slides hands free on the rope up and down automatically. Should a fall occur or in case of unexpected descent, the **ASC'O** locks instantly and secures the user. With its unique opening system, **ASC'O** mobile fall arrester associates comfort of use and maximum safety. It can be locked on the rope to allow the user to remain hands free at any level of the rope. The **ASC'O** can be used with an extension strap or a shock absorber to work with a distance from the rope.

REF: **NSD19** ASC'O mobile fall arrester + 1 aluminum connector  
Other versions, contact us.

**EASY AND SAFE TO SET UP**

Thanks to its innovative opening system, it is very easy to open the device and to set it up without any possible mistake. Simple, quick and safe, the set up on its associated rope (**TWIST 11**) only takes few seconds.



**MULTI-STANDARDS MULTI-CONFIGURATIONS**

EN 353-2 - RFU 11.062  
EN 12841-A

ASC'O mobile fall arrester  
+ 1 connector

EN 353-2  
RFU 11.062 / 11.075

ASC'O mobile fall arrester  
+ 2 connectors  
+ 1 extension strap

ASC'O mobile fall arrester  
+ 2 connectors  
+ 1 shock absorber

R ≥ 0.5



EN 1891 type A

**TWIST 11<sup>MM</sup>**

flexible anchorage line - semi-static rope

**100 % polyamide high tenacity**

The **TWIST** rope of Ø 11 mm in polyamide high tenacity, is a semi-static multifunction rope, durable and easy to handle. It is the flexible anchorage line for the mobile fall arrester **ASC'O** and allows the user to be safe during its works at height.

**+ VERY LOW ELONGATION, SOFT AND EASY TO HANDLE**

# NEW ZENITH X RANGE

replaces the zenith range

## ZENITH X



### available colors

- WHE00073-201 WHITE
- WHE00073-203 ORANGE
- WHE00073-204 RED
- WHE00073-210 BLACK

## ZENITH X PL



### available colors

- WHE00079-201 WHITE
- WHE00079-203 ORANGE
- WHE00079-204 RED
- WHE00079-210 BLACK



### KL-1

WLA00001

- MAX 400 lm
- MAX 40 h
- MAX 180 m
- IP 54
- RECHARGEABLE BATTERY included
- 98 g battery included

### KL-2

WLA00002

- MAX 600 lm
- MAX 60 h
- MAX 200 m
- IP 54
- RECHARGEABLE BATTERY included
- 139 g battery included

### KL-3

WLA00003

- MAX 1000 lm
- MAX 100 h
- MAX 320 m
- IP 54
- RECHARGEABLE BATTERY included
- BLUETOOTH® CONNEXION
- 179 g battery included

## SPECIFICATIONS

X X PL



### STANDARDS

EN 397  
EN 50365 (Class 0)  
EN 12492



### MATERIALS

EXTERNAL SHELL:  
HD Polypropylene  
INTERNAL SHELL:  
HD Expanded Polystyrene  
HEADBAND:  
Soft PA Nylon



### SIZE

Unique size  
adaptable from 52 to 63 cm



### WEIGHT

490 g  
480 g

## TECHNOLOGIES



50365 ELECTRICAL SHOCK PROTECTION



ELECTRIC SHOCK PROTECTION



VENTILATION CHANNELS



ADAPTIVE FIT SYSTEM



DRY+ FABRIC



CLICK-IN SYSTEM



FRONTAL ACCESSORY SLOT



ADVANCED CHINSTRAP

## FULL FACE VISOR

For Plasma range  
WVI00024

adaptors needed  
NCAS00005



For Zenith range  
WVI00022

adaptors needed  
NCAS9000  
NCAS10000



## BADGE HOLDER

### LIGHT

For Plasma range  
WAC00042

For Zenith range  
WAC00047



### INTEGRATED

For Zenith X range  
WAC00048





# Fall protection only

## CUSTOMER SERVICE

Information, advices, technical informations, user manuals, our customer service will help you in the use of the whole **NEOFEU** range.

This service is located in France and available from monday to friday from **8:30<sup>AM</sup>** to **5:30<sup>PM</sup>**.

### BY PHONE

+33 (0) 4 78 48 75 33

### BY E-MAIL

[neofeu@neofeu.com](mailto:neofeu@neofeu.com)

**neofeu** )

#### offices and production unit

Zone Industrielle Richard Bloch - Chassagny - 69700 Beauvallon France

Tel. : +33 (0) 4 78 48 75 33 - Fax : +33 (0) 4 78 48 77 45

[neofeu@neofeu.com](mailto:neofeu@neofeu.com)  
[neofeu.com](http://neofeu.com)



by **PMS GROUP**  
FABRICANT FRANÇAIS