


Fall  
Protection  
Only

neofeu )



by PMS GROUP  
FABRICANT FRANÇAIS

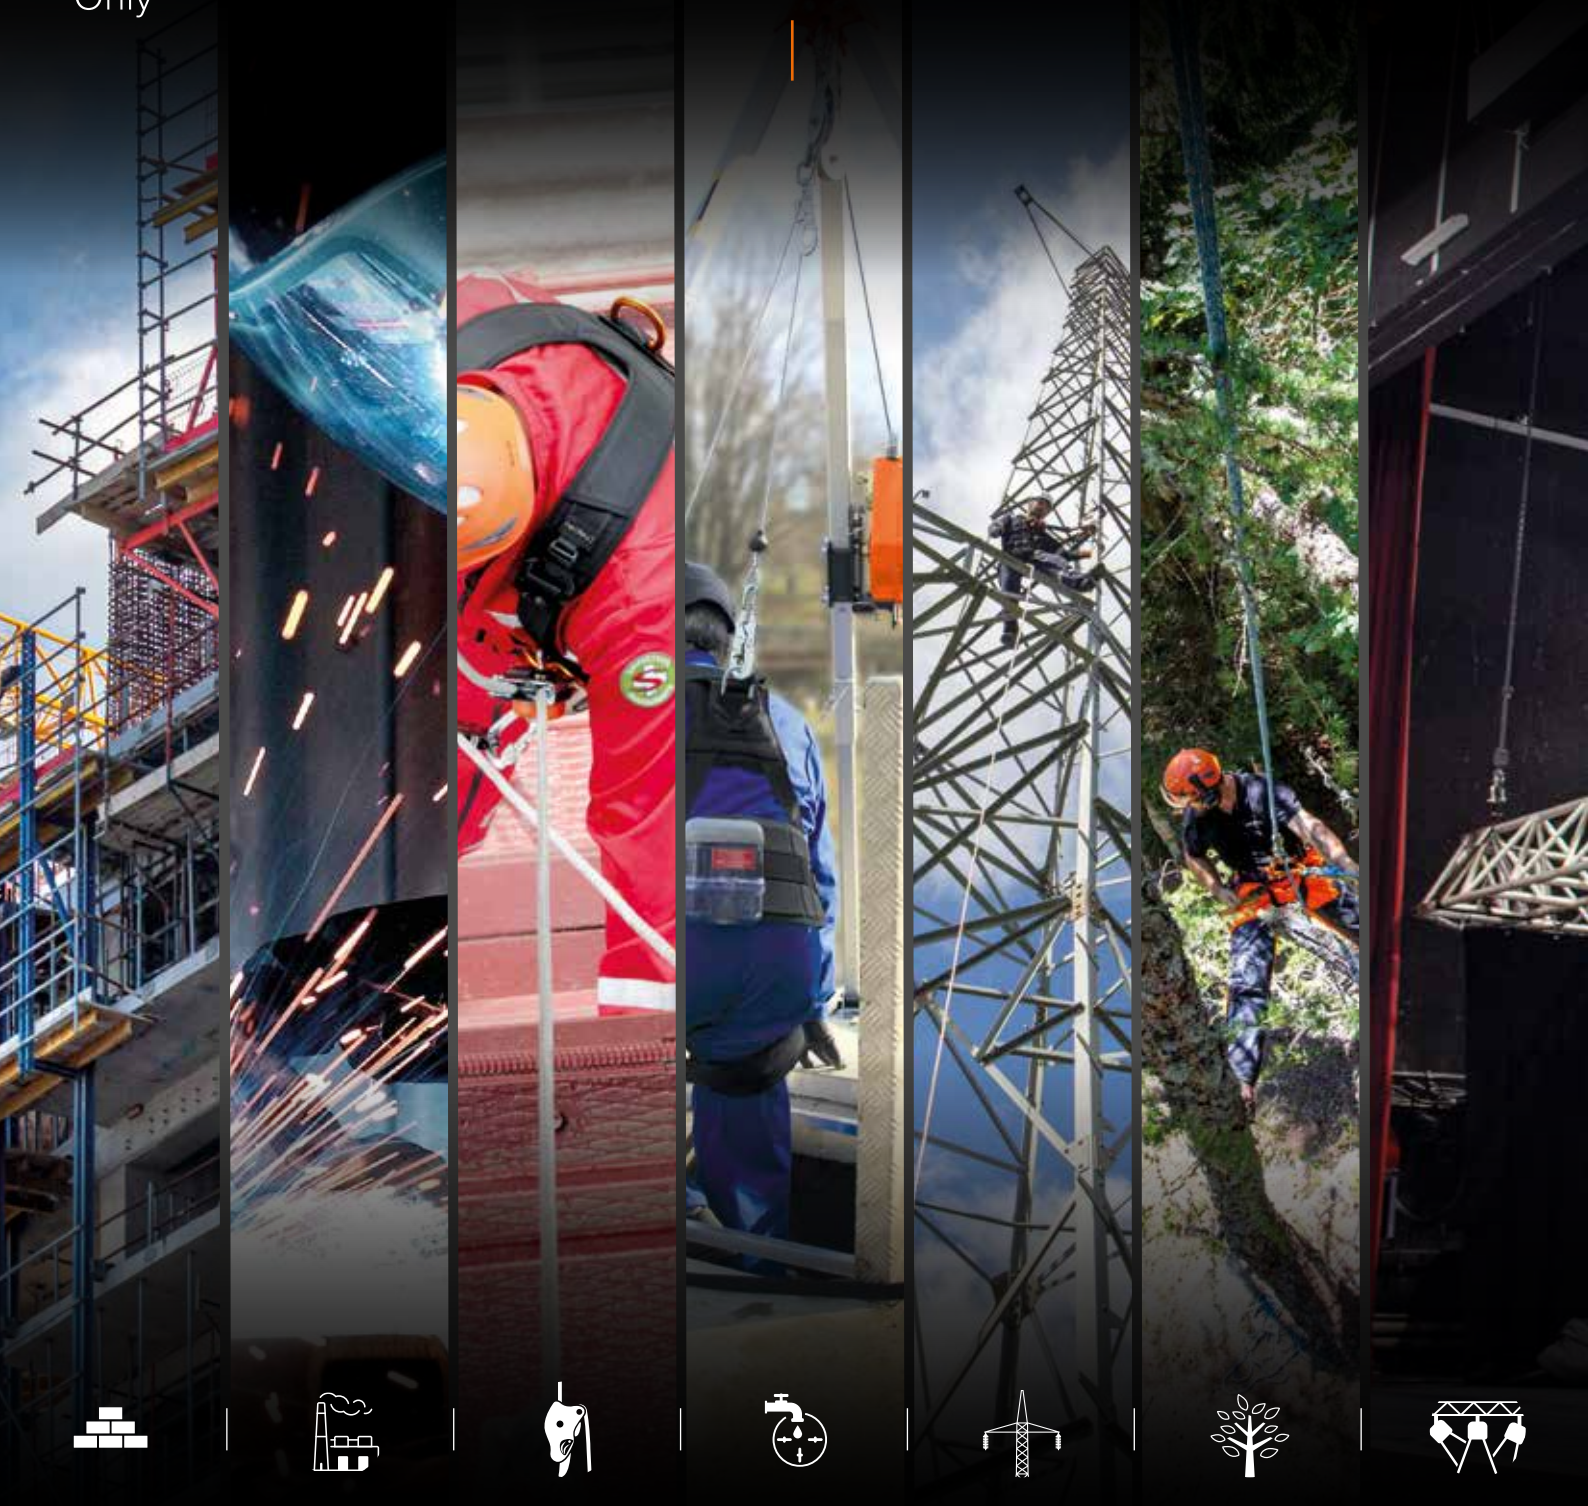

# BEST OF

PROFESSIONAL | EDITION 1

MANUFACTURING, STANDARDS & REGULATION



GB

SAFETY | QUALITY | TRACEABILITY



# TABLE OF CONTENTS

## INFORMATION

NEOFEU _____ // 03	OUR MARKETING TOOLS _____ // 05
OUR DIFFERENCES _____ // 04	CSR COMMITMENTS _____ // 06
THE GROUP _____ // 05	KNOWLEDGE BASE _____ // 07
OUR NEWS _____ // 05	YOUR INDUSTRIES _____ // 10

## INNOVATION \_\_\_\_\_ // 11

## FULL BODY HARNESSES

ILE'O® _____ // 12	Pack&G'O® _____ // 14
ALT'O® _____ // 12	KTP EVO _____ // 14
VIT'O® _____ // 13	NUS55/C _____ // 15
ARB'O® _____ // 13	ECO _____ // 15

## SETS BY INDUSTRY

ROOF _____ // 16	CONSTRUCTION _____ // 17
ECO ROOF _____ // 16	POLE _____ // 17
AERIAL WORK PLATFORM _____ // 16	PLATFORM _____ // 17
SCAFFOLD _____ // 16	PACKAGING IN CARDBOARD BOX _____ // 17

## LANYARDS AND ABSORBERS

ABS'O® ED\GE : ELASTIC _____ // 18	CONNECTING LANYARD _____ // 19
ABS'O® ED\GE : ROPE _____ // 18	ERG'O® _____ // 19
ABS'O® _____ // 18	PACKAGING IN CARDBOARD BOX _____ // 19

## RETRACTABLE TYPE FALL ARRESTERS

EAGLE EDGE® _____ // 20	EDGE   NEO020 _____ // 20
NEO EDGE   EVO® _____ // 20	

## ANCHOR DEVICES

ALUMINUM TRIPOD _____ // 21	WEBBING SLINGS _____ // 21
MOBILE LIFELINE _____ // 21	FIXED ANCHORS _____ // 21
LAN'O® _____ // 21	

## ACCESSORIES

PEGASO WORK : INDUSTRIAL HELMET _____ // 22	TOOLS TETHERING _____ // 22
TRANSPORT BAGS _____ // 22	

## LOAD FALL ARRESTERS \_\_\_\_\_ // 22

# WHO ARE WE ?



## HISTORY

NEOFEU is a long time experienced company, created in the 1950s. The fire equipment activity that led to the name NEOFEU, was sold in September 2000. Since then, the company only focus is on **protection against fall from height**.

In a very concentrated sector, **NEOFEU**, is positioned on the French market as one of the last independent company dedicated to this industry.

The core business of the company is the **design, manufacture, marketing, advice** for use, **maintenance** of personal protective equipment against fall from a height and **load arresters** (up to 5 tons).

## EXPERTISE

We offer our customers a complete range of products **designed and manufactured locally**, complemented by brands renowned for their high level of technical expertise. All products comply with **standards in force**.


The products manufactured by NEOFEU are subject to **individual controls in its test center**, so they comply with the most stringent safety standards.



## INNOVATION

Our integrated technical department uses the latest **CAD and 3D printing** technologies. It allows us to control prototyping and to innovate continuously.

NEOFEU is also a **60 years old experience** company and the warranty of a **french manufacturer** of products recognized for their **high level of quality**.

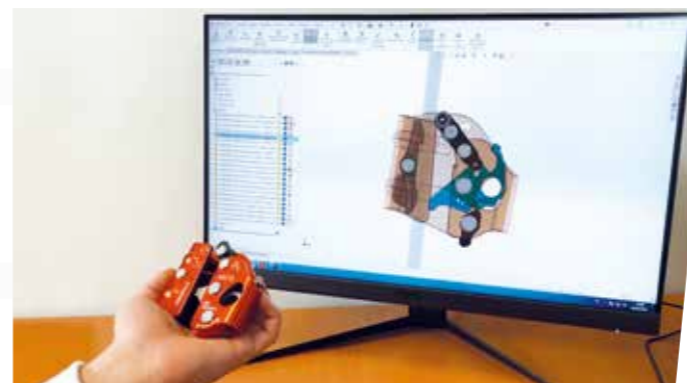

## PRODUCTION

A **textile workshop**, a **mechanical production center**, measuring instruments, and a **drop tower** all located in the same facility. A wide range of fall protection products manufactured in our **Beauvallon factory**.

Our organization enables us to maintain **control and traceability** on raw materials, components, and finished products.




# FRENCH MANUFACTURER

Each product with this flag has been designed in France

By choosing **NEOFEU**, a renowned French manufacturer, you fully benefit from our **expertise** and our **commitment to quality**. Whether it concerns standard or specific products, you receive full **support throughout the process** to meet your requirements. With NEOFEU, your trust a French manufacturer is turned into reliable, high-performance, and durable products.

## PROXIMITY

Choosing a French manufacturer also means proximity and also, responsiveness !  
Special needs ? Our teams are flexible to suit your needs.

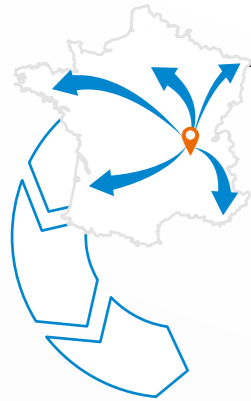

- CUSTOM MANUFACTURING** on request
- EXPRESS DELIVERY** on request
- TECHNICAL SUPPORT**
- CUSTOMER SERVICE AT YOUR DISPOSAL**



## QUALITY


The selection of high-quality components, strict compliance to standards and our longstanding expertise grant us a high level of manufacturing performance.



- PRODUIT BREVETÉ BREVETÉ** PATENTED PRODUCTS
- 60 ANS** MORE THAN 60 YEARS OF EXPERTISE
- HIGH QUALITY COMPONENTS**
- CE** CERTIFIED PRODUCTS
- afaq ISO 9001** Qualité AMON CERTIFICATION ISO 9001 CERTIFIED

## TRACEABILITY

Each component of each product is traced and tested to ensure the safety of all our productions. Finished products are also periodically tested to ensure maximum safety.

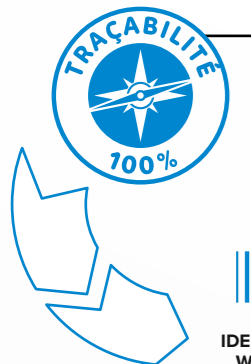

- IDENTIFICATION WITH SERIAL NUMBER**
- STRICT SUPPLIER SELECTION**
- STATIC TESTING ON BENCHES**
- DYNAMIC TESTS ON A DROP TOWER**



## THE GROUP TODAY

In november 2018 NEOFEU integrated **PMS Group**, which benefits from an international presence throughout different sites and subsidiaries in France, Italy, Tunisia and the United Arab Emirates.

Working with **PMS Group** is the choice for the **quality of a unique expertise**, the experience of a manufacturer and the strength of a dedicated team of employees. The group offers products compliant with European standards and enjoys **the trust of the most requiring customers**.

This year, the group bids farewell and wishes a well-deserved retirement to its CEO, Patrick DESFORET. In order to ensure the continuity of the PMS group, all partners remain on board and decide to integrate the **UNITEX** group.

This collaboration with UNITEX is a chance for PMS group to further develop, through opportunities offered by this international group.



by **PMS GROUP**  
FABRICANT FRANÇAIS

## UNITEX GROUP



by **PMS GROUP**  
FABRICANT FRANÇAIS



## OUR NEWS

Stay updated on all NEOFEU news throughout our **social media channels** : explore product information, stay in the loop about new releases, and access exclusive offers. Feel free to " like, comment, and share ! ".



## OUR MARKETING TOOLS

**Retailers, distributors, platforms** are the necessary tools for the turnover development.


In our commitment to built **partnership** and to **increase our sales together**, we offer you effective marketing solutions.

Our communication media can be **customized** to fit **your image**. Contact our sales department for further information.



PRODUCTS PACKAGING

Products easy to carry, to store and attractive. We constantly adapt our solutions to offer you more convenient and environment-friendly packaging.

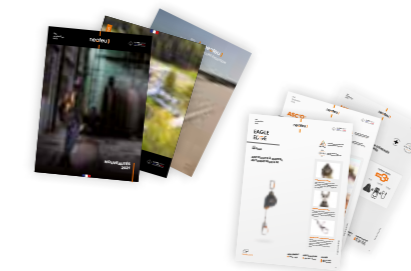

INTEGRATED MARKETING DEPARTMENT

Data sheets, user manuals, advice, promotional campaigns, catalogues.... For use within your own networks or intended for the user.



DISPLAYS AND SHELF SPACES

We offer the complete installation of your shelf spaces and have available the necessary accessories to fit your existing shelves (magnetic banners, torso on foot...).

In 2022 as a committed player, **NEOFEU** achieved a greenhouse gas emissions assessment and committed itself into a transition process through « **Décarbon'Action** » a program held by **Bpifrance** in partnership with **ADEME** (French Environmental and Energy Management Agency) and **Association Bilan Carbon** (Carbon Balance Association).

## THE MISSION

To establish an initial quantitative assessment of our greenhouse gas (CO2) emissions for a reference year, in order to analyze and implement targeted actions.



## DETAILED STUDY

We have studied different scopes\* surrounding NEOFEU and analyzed several elements: raw materials, subcontractors, packaging, freight, travel, equipment, direct waste, and energies.

All the data collected has been converted into CO2 emissions, allowing us to obtain a breakdown of the company's greenhouse gas (GHG) emissions.

\*Scopes refer to the boundary within which greenhouse gas (GHG) emissions of the organization or product in question are studied.



## TARGET FIXED

A target for reducing greenhouse gas emissions by **5% per year by 2030** has been validated (Energy-Climate Law).

This will be possible through targeted actions that will have a lasting impact on our production methods and the way we design our products.



## ACTIONS



Production unit in France



Diminution of plastic packaging



Choice on the component's origin



Repairability and lifespan of products



Sorting and valuation of garbage



MEMBER OF  
**LE COQ VERT**

Community goal : create collective drive in favor of the ecological and energy transition (EET).



MEMBER OF  
**LA FRENCH FAB**

Group of companies, economic actors, based in France with the desire to develop the French industry.

## REGULATION UE 2016/425



The Regulation lays down new requirements for the design and manufacture of PPE which is to be made available on the market in order to ensure protection of the health and safety of users and established rules on the free movement of PPE in the Union.

The PPE are still classified as PPE of category 3 "**lethal risk**". The new obligations for the manufacturers as follows :

- Every single PPE must be delivered with a EU declaration of conformity, or the manufacturer indicates in the user manual the internet address where to find it. The new Declaration of conformity are already available directly on our web site at **www.neofeu.com** under the heading "declaration of conformity".
- The EU type examination certificates has a lifespan limited to **5 years**.
- The products marking and the instructions of use are evolving to improve traceability and a clear identification of the manufacturer.
- All economic operators become responsible in the sourcing and distribution chain.

The conformity assessment procedure to be followed is either conformity to type based on internal production control plus supervised product checks at random intervals by a notified body (module C2) or conformity to type based on quality assurance of the production process assessed by a notified body (module D).

## LIFESPAN **10 ANS**

The NEOFEU PPE against fall from a height are designed to be used for many years in normal conditions of use and storage.

**The lifespan depends on the using conditions.**

Some particularly aggressive environments like marine, siliceous, chemical ones can reduce the PPE life span. In such cases, a particular attention must be paid to its protection and control before use.

The mandatory yearly inspection by an authorized competent person will certify the correct working conditions of the equipment and its serviceable condition. Only the manufacturer or its competent agent can decide in writing whether to put back the fall arrester into service or not.

## TRAININGS



**WEAR AND USE PERSONAL PROTECTIVE EQUIPMENT (PPE) FOR FALL PROTECTION**



**ANNUAL PERIODIC INSPECTION**



**MAINTENANCE AND REPAIR OF RETRACTABLE TYPE FALL ARRESTER**

Contact us to discuss about your training needs !

## ANNUAL MAINTENANCE

**All PPE** against falls from a height are classified as category 3 for lethal risk. They are subject to an **annual periodic inspection** from the date of first use.

NEOFEU has a dedicated **after sales service** to track and maintain your equipment in the best safety conditions. We also offer training sessions on how to inspect your PPE with respect to our inspection procedures.



## STANDARDS GUIDE

- EN 353-2** Guided type fall arresters on flexible anchor line
- EN 354** Lanyards
- EN 355** Shock absorbers
- EN 358** Belts & work or restraint positioning lanyards
- EN 360** Retractable type fall arresters
- EN 361** Full body harnesses
- EN 362** Connectors

- EN 397** Industrial protective helmets
- EN 795** Anchor devices
- EN 813** Sit harnesses
- EN 1497** Rescue harnesses
- EN 1891-A** Low stretch kernmantel ropes
- EN 12841-A** Rope access systems

## FALL PROTECTION SYSTEMS




### FALL ARREST SYSTEMS

Intended to reduce the impact force on the user in case of fall.



### RESCUE SYSTEMS

Intended for self rescue or to rescue an operator in case of a fall.



### WORK POSITIONING SYSTEMS

These systems are intended for work positioning or for restraint to prevent the operator from reaching hazardous areas.



### SUSPENSION SYSTEMS

These allow the user to access from one working area to another using a rope.

## THE COMPOSITION OF A FALL ARREST SYSTEM

3 mandatory components !

**ANCHOR**  
**FULL BODY HARNESS**  
**FALL ARRESTER**



EN 795 TYPE  
A<sup>(1)</sup> / B / C<sup>(1)</sup> / D<sup>(1)</sup> / E

<sup>(1)</sup> Not PPE

Lifeline  
Tripod  
Webbing sling  
Anchor point

EN 361  
EN 358  
EN 1497  
EN 813

Full body harness  
Belt

EN 355  
EN 353-1  
EN 353-2  
EN 360

Shock absorber  
Guide type fall arrester on anchor line  
Retractable type fall arrester

### STANDARDS

### TYPE OF PRODUCTS





## MAJOR RISKS RELEVANT TO FALL ARREST SYSTEMS

- **Fall factor** : It determines the fall distance with regards to the anchor point.
- **Clearance** : Is the necessary vertical distance of free fall without obstacle.
- **Pendulum effect** : Occurs in case of lateral movement with regards to the fall arrester anchor point overhead the user and can cause severe injuries in the pendulum area in case of obstacle.

## FALL FACTORS

The fall factor determines the fall arrest distance with regards to the location of the anchorage point of the fall arrester.

**It is recommended that the anchorage point is located above the user.**

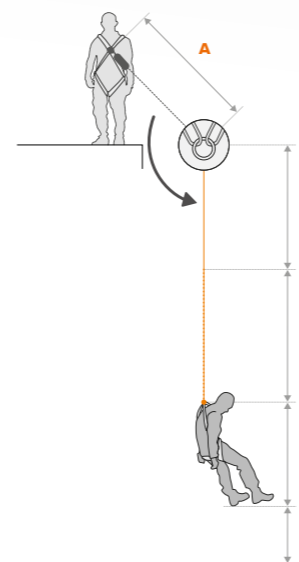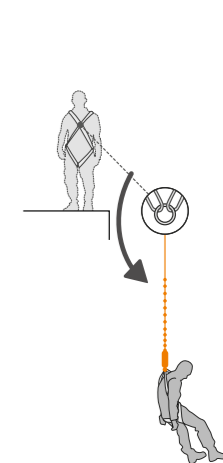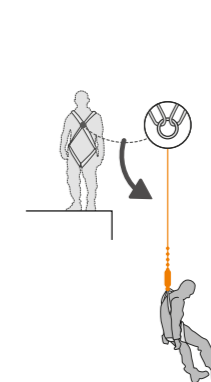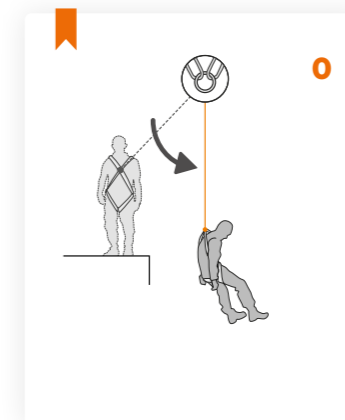

This is the necessary minimum vertical free fall distance under the user's feet without obstacle. It depends on the fall arrest equipment and the location of the anchorage point (see fall factor).


**Minimum clearance = A + B + C + D**

## MINIMUM CLEARANCE

- A** Overall length of the fall arrest equipment in use
- B** Arrest distance according to the fall arrest equipment in use
- C** Distance between the fall arrest attachment point on the harness and the user's feet
- D** 1 m of safety distance


## PENDULUM EFFECT

Occurs in case of lateral movement with regards to the fall arrester anchor point overhead the user and can cause **severe injuries** in case of **obstacle** in the pendulum area.

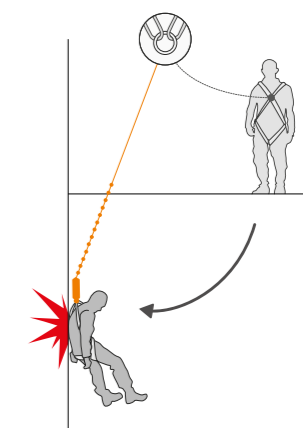



						Load fall arrester Not a PPE.

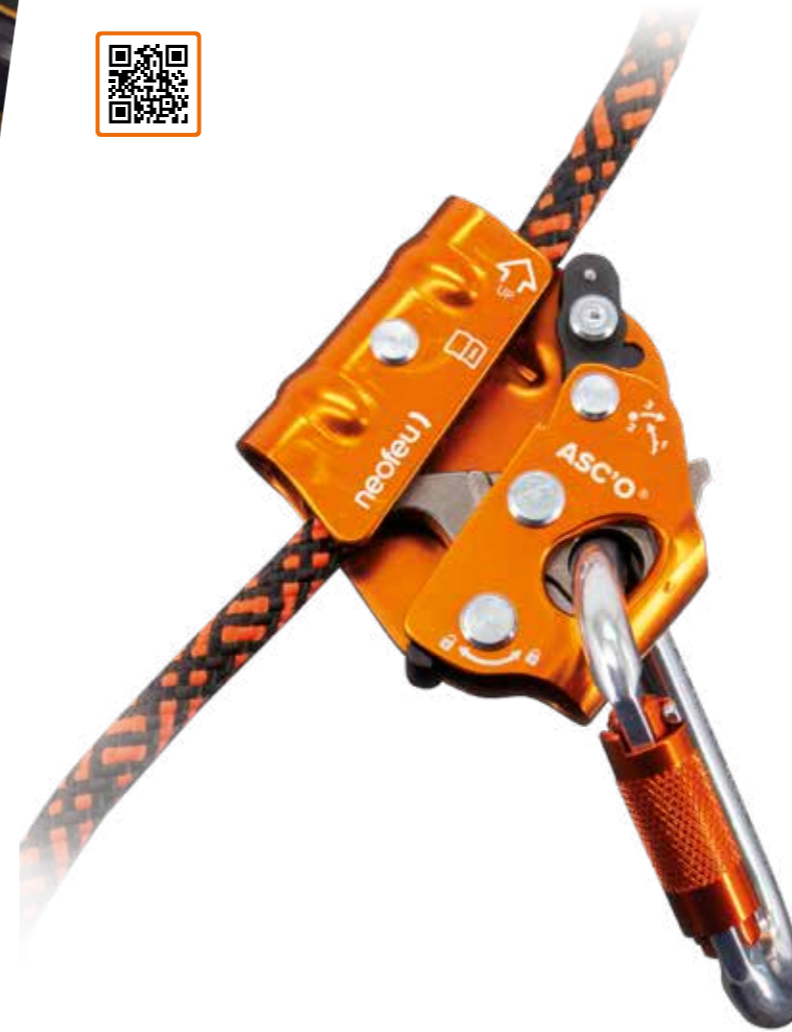

**ASC'O®**

MOBILE FALL ARRESTER ON FLEXIBLE ANCHORAGE LINE



EN 353-2    EN 12841-A    RfU 11.062



TESTED FOR HORIZONTAL USE (EDGE)  
R ≥ 0.5

MAX  
140 KG

TESTED FOR USE AT 140 KG



USE ON Ø11MM ROPE

**ASC'O®** is a mobile fall arrester in aluminum to use on **TWIST 11®** rope to secure your works at height.

In normal use, the device slides hands free on the rope up and down automatically.

Should a fall occur or in case of unexpected descent, **ASC'O®** locks instantly and secures the user.

With its **unique patented opening system**, **ASC'O®** mobile fall arrester associates comfort of use and maximum safety.

It can be locked on the rope to allow the user to remain hands free at any level of the rope.

**EASY AND SAFE TO SET UP**

Thanks to its innovative opening system, **ASC'O®** is very easy to use.



REFERENCES





# ILE'O®

PYLONIST / INDUSTRIAL MAINTENANCE HARNESS

EN 361 EN 358 EN 813 EN 1497

ILE'O® is a versatile fall arrest and rescue harness, providing comfort, strength and ease of use. Suitable for users up to 140kg, it comes with a lot of options and is donned like a vest.



ALUMINUM AUTOMATIC BUCKLES + INDICATOR



REPELLENT WEBBING

4

4 ATTACHMENT POINTS  
BACK / FRONT / VENTRAL / POSITIONING



FALL INDICATORS

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NUS140	NUS140..S	NUS140..ML	NUS140..XL	NUS140..XXL



# VIT'O®

FULL BODY AND RESCUE HARNESS

EN 361 EN 1497

The fall arrest harness VIT'O combines comfort, lightweight design, and safety, easily adapting to all body types thanks to highly efficient adjustment and locking systems.

The NUS87A version provides additional basic comfort with its elastic straps at shoulder level.



ALUMINUM AUTOMATIC BUCKLES + INDICATOR



REPELLENT WEBBING

2

2 ATTACHMENT POINTS  
BACK / FRONT  
POSITIONING WITH OPTIONAL BELT



FALL INDICATORS

REFERENCES

Base	Back PAD	Extension strap	Back PAD + extension strap	Integrated belt	Belt + back PAD	Belt + extension strap	Belt + Back PAD + strap
NUS77A	NUS77AP	NUS77AEX	NUS77AEXP	NUS77C	NUS77CP	NUS77CEX	NUS77CEX
NUS87A	NUS87AP	NUS87AEX	NUS87AEXP	NUS87C	NUS87CP	NUS87CEX	NUS87CEX



NUS77AP



NUS77A

NUS87A



# ALT'O®

ROPE ACCESS HARNESS

EN 361 EN 358 EN 813 EN 1497

ALT'O® is a versatile, lightweight, and comfortable harness designed for rope access. It provides quick setup and easy adjustments, ensuring optimal comfort.



ALUMINUM AUTOMATIC BUCKLES + INDICATOR



REPELLENT WEBBING

4

4 ATTACHMENT POINTS  
BACK / FRONT / VENTRAL / POSITIONING

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NUS130	NUS130..S	NUS130..ML	NUS130..XL	NUS130..XXL



# ARB'O®

TREE CLIMBING BELT

EN 358 EN 813

ARB'O® is seat belt for work positioning especially designed for tree climbing, providing optimal comfort with its breathable pads, wide back support, and quick adjustments.



ALUMINUM AUTOMATIC BUCKLES + INDICATOR



REPELLENT WEBBING



DOUBLE SUSPENSION BRIDGE WITH ALUMINUM RINGS



+ REPLACEMENT DOUBLE BRIDGE IN ARAMID INCLUDED

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NELUS150	NELUS150..S	NELUS150..ML	NELUS150..XL	NELUS150..XXL



EXCLUSIVE



PRODUIT BREVETÉ  
BREVETÉ  
PATENTED PRODUCT

## Pack&G'O®

FULL BODY HARNESS WITH INTEGRATED TRANSPORT BAG

EN 361

Pack&G'O® is an innovative, exclusive, and patented full body harness. It incorporates a carrying bag to provide additional comfort to the user while allowing for quick storage.



STEEL AUTOMATIC BUCKLES + INDICATOR



REPELLENT WEBBING

2

2 ATTACHMENT POINTS BACK / FRONT



INTEGRATED TRANSPORT BAG



FALL INDICATORS

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NUS57P	NUS57P.S	NUS57P.ML	NUS57P.XL	NUS57P.XXL
<i>Without bag / PAD</i>				
NUS57	NUS57.S	NUS57.ML	NUS57.XL	NUS57.XXL



The Pack&G'O is ready to use instantly: the harness is ready to be put on right after the bag is turned over. Easy to store and transport, once folded, it provides protection for the harness.



UNIQUE CONCEPT

IN 1 3

The bag The harness The lanyard



## KTP EVO

FULL BODY HARNESS WITH INTEGRATED SYSTEM

The KTP EVO harnesses are complete fall protection systems ready to use.

PRODUIT BREVETÉ  
BREVETÉ  
PATENTED PRODUCT



KTPEVO2



KTPEVO4



KTPEVO6



KTPEVO9



KTPEVO11

REFERENCES



## NUS55 / NUS55C

FULL BODY HARNESS / FULL BODY HARNESS WITH BELT

EN 361 + EN 358 NUS55C

Fullbody harness bicolor in polyester webbing with 2 fall arrest attachment points (back and front), flat buckles for easy adjustment, and 2 fall indicators.



STEEL MANUAL BUCKLES



FALL INDICATORS

2

2 ATTACHMENT POINT BACK / FRONT / ( POSITIONING NUS55C )

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NUS55	NUS55.S	NUS55.ML	NUS55P.XL	NUS55.XXL
<i>With integrated work positioning belt</i>				
NUS55C	NUS55C.S	NUS55C.ML	NUS55C.XL	NUS55C.XXL



NUS55



NUS55C



## ECO

FULL BODY HARNESS

EN 361 + EN 358 NUSL4ECO

Economical full body harnesses with 1, 2, or 3 attachment points (3 models available). Available in one size fits all.



STEEL MANUAL BUCKLES


UNIQUE SIZE

REFERENCES

1 attachment point	2 attachment points	3 attachment points + work positioning belt
NUSL1ECO	NUSL2ECO	NUSL4ECO





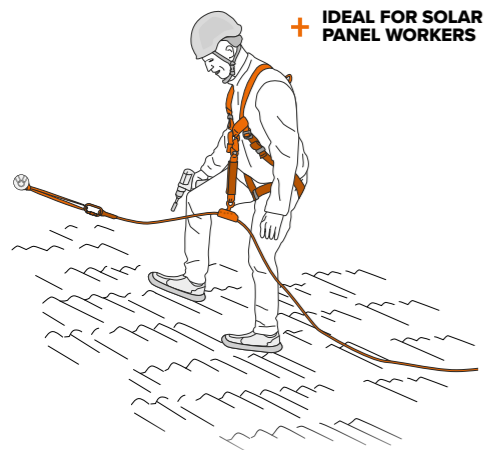


+ IDEAL FOR SOLAR PANEL WORKERS

**NKITTOIT1** | ROOF SET




**NKITXLBAT2** | CONSTRUCTION SET

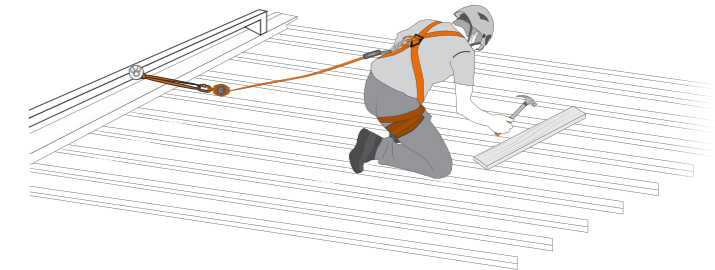

**NKITTECO4** | ECO ROOF SET





**NKITPOTEAU** | POLE SET

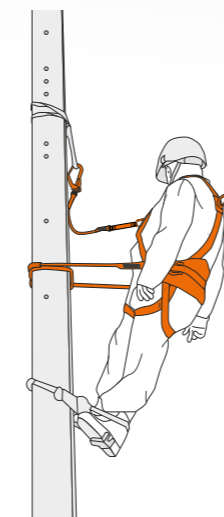


**NKITNACEL1** | AERIAL WORK PLATFORM SET



**NKITPLATEFORME** | PLATFORM SET

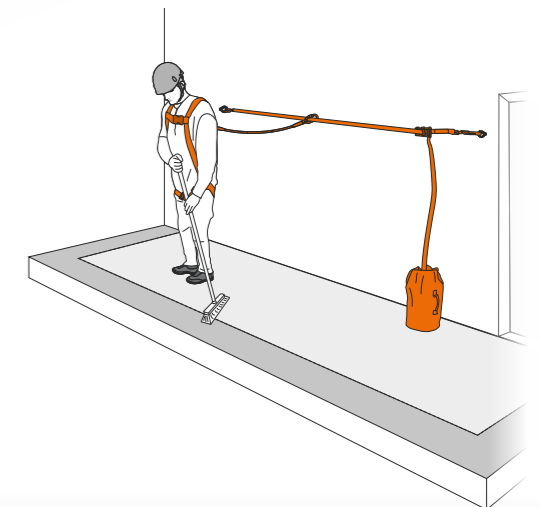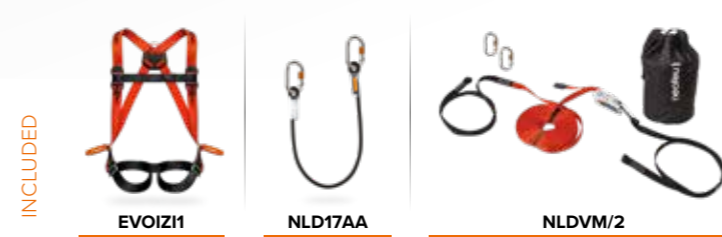

**NKITECHAF2** | SCAFFOLD SET

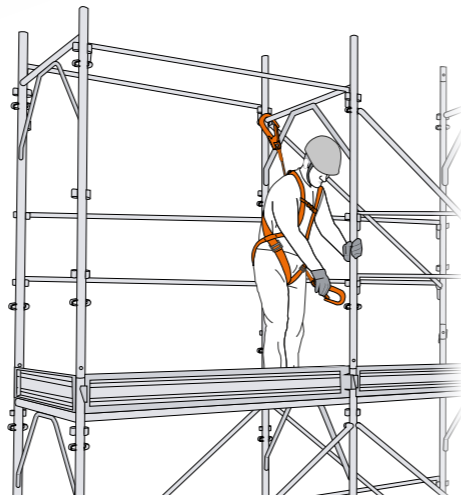

**Packaging in cardboard box**


The industry sets are offered in cardboard boxes, providing a practical, appealing presentation suitable for all shelves. They are easy to transport and store.



Ideal presentation by industry



The box is sealed



Storage optimization



Dimensions : 430 x 300 x 160 mm

**REFERENCES**

Standard	Cardboard box
NKITTOIT1	NKITTOIT1.BC
NKITECO4	NKITECO4.BC
NKITNACEL1	NKITNACEL1.BC
NKITECHAF2	NKITECHAF2.BC
NKITXLBAT2	NKITXLBAT2.BC
NKITPOTEAU	NKITPOTEAU.BC
NKITPLATEFORME	NKITPLATEFORME.BC

# SHOCK ABSORBER LANYARDS

# CONNECTING AND RESTRAINT LANYARDS

## ABS'O® | NHEA10 NHEYA10

SHOCK ABSORBER WITH INTEGRATED ELASTIC LANYARD

range **EDGE**

EN 355 RfU 11.062 RfU 11.074

The elastic lanyard allows users to have greater freedom of movement, making it easier for them to move around the work site.



TESTED TO HORIZONTAL USE (ED/GE)  $R \geq 0.5$

MAX 140 KG

TESTED FOR USE UP TO 140 KG



ELASTIC WEBBING LANYARD = REDUCED DIMENSIONS

### REFERENCES

Model	Base	Connectors <sup>(1)</sup>		
		Aluminum triple lock	Aluminum triple lock + steel large opening	Aluminum triple lock + aluminum large opening
Single	NHEA10	NHEA10MM	NHEA10MB	NHEA10MC
Double	NHEYA10	NHEYA10MM	NHEYA10MB	NHEYA10MC



## NLS NLSY NLD NLDY

CONNECTING LANYARD

EN 354

Single or double, webbing or rope, the connecting lanyard will restrain the user's movement to prevent a fall from height.



SINGLE



ROPE

STANDARD : 1m / 1m3 / 1m7  
CUSTOM : Jusqu'à 5m

### REFERENCES

Single	Double	1 m	1,3 m	1,7 m
NLSxx	NLSYxx	NLS10 / NLSY10	NLS13 / NLSY13	NLS17 / NLSY17
NLDxx	NLDYxx	NLD10 / NLDY10	NLD13 / NLDY13	NLD17 / NLDY17



## ABS'O® | NHDA10 NHDYA10

SHOCK ABSORBER WITH INTEGRATED ROPE LANYARD

range **EDGE**

EN 355 RfU 11.062 RfU 11.074



TESTED TO HORIZONTAL USE (ED/GE)  $R \geq 0.5$

MAX 140 KG

TESTED FOR USE UP TO 140 KG

### REFERENCES


Model	Base	Connectors <sup>(1)</sup>		
		Aluminum triple lock	Aluminum triple lock + steel large opening	Aluminum triple lock + aluminum large opening
Single	NHDA10	NHDA10MM	NHDA10MB	NHDA10MC
Double	NHDYA10	NHDYA10MM	NHDYA10MB	NHDYA10MC

## ERG'O®

ADJUSTABLE WORK POSITIONING LANYARD

EN 358

Thanks to its ergonomic tensioner and aluminum connectors, **ERG'O®** is efficient, durable, and easy to use.



ERGONOMIC TENSIONER



POLYAMIDE ROPE Ø12MM



ABRASION-RESISTANT PROTECTIVE SHEATH

MAX 140 KG

TESTED FOR USE UP TO 140 KG

### REFERENCES

Base	2 m	3 m	4 m
NLR..MV	NLR20MV	NLR30MV	NLR40MV



## ABS'O® | NSAT13 / 17 NSYAT13 / 17 NDATA13 / 17 NDYAT13 / 17 NEA13 / 17 NEYA13 / 17

SHOCK ABSORBER WITH INTEGRATED LANYARD

EN 355 RfU 11.062 RfU 11.074

Available in webbing, rope, or elastic webbing, the fall arrest lanyard is available in **1,3m** or **1,7m** versions excluding connectors.



WEBBING



ROPE



ELASTIC

### REFERENCES

Single	Double	1,3 m	1,7 m
NSATxx	NSYATxx	NSAT13 / NSYAT13	NSAT17 / NSYAT17
NDATxx	NDYATxx	NDAT13 / NDYAT13	NDAT17 / NDYAT17
NEAxx	NEYAxx	NEA13 / NEYA13	NEA17 / NEYA17



### Packaging in cardboard box

The lanyards are also available in cardboard boxes, providing a more convenient, appealing, and shelf-friendly presentation. They are easy to carry and store.

#### REFERENCES


Add .BC to your product reference.



Ideal presentation of features



The box is sealed



Storage optimization



Dimensions : 140 x 140 x 250 mm



(1) Consult our general catalogue to see all available connectors.

### EAGLE EDGE®

WEBBING RETRACTABLE TYPE FALL ARRESTER

EN 360 RfU 11.060 RfU 11.062

Lightweight and compact fall arrester with a 6m automatic retractable webbing lanyard.

TESTED TO HORIZONTAL USE (EDGE)  $R \geq 0.5$  | MAX 140 KG | TESTED FOR USE UP TO 140 KG | 6M DYNEEMA WEBBING

REFERENCE  
NEO060

LIGHTWEIGHT + COMPACT



### NEO EDGE | EVO®

CABLE RETRACTABLE TYPE FALL ARRESTER

EN 360 RfU 11.060 RfU 11.062

Fall arrester easily transportable with its textile handle and equipped with a 12m automatic retractable cable lanyard.

TESTED TO HORIZONTAL USE (EDGE)  $R \geq 0.5$  | MAX 140 KG | TESTED FOR USE UP TO 140 KG | 12M STEEL CABLE

REFERENCE  
NEO120EVO

CARRYING HANDLE +



### EDGE | NEO020

WEBBING RETRACTABLE TYPE FALL ARRESTER

EN 360 RfU 11.060 RfU 11.062 RfU 11.085

Antichute léger avec longue sangle rétractable automatique de 2m et équipé d'un absorbeur d'énergie.

TESTED TO HORIZONTAL USE (EDGE)  $R \geq 0.5$  | MAX 140 KG | TESTED FOR USE UP TO 140 KG

2.5M HIGH-DENSITY POLYETHYLENE WEBBING | TESTED FOR FALL FACTOR 2



### NTREALU2

ALUMINUM TRIPOD

MAX 200 kg

EN 795 TYPE B

The NTREALU2 aluminum tripod is easy to transport, quick to set up, and allows to set up pulleys for a retractable type fall arrester, as well as a hoist for lifting.

HEAD WITH 4 ANCHORING POINTS | REINFORCED ALUMINUM FOOT | TELESCOPIC STRUCTURE | TRANSPORT BAG NSACTRE2



### NLDVM/2

TEMPORARY WEBBING ANCHOR LIFELINE SET

EN 795 TYPE B

NLDVM is a temporary anchorage device with webbing slings at both ends, enabling a quick and secure set up thanks to its steel ratchet tensioner.

DESIGNED FOR USE BY 2 USERS



### LAN'O®

ADJUSTABLE ANCHOR STRAP

EN 795 TYPE B

LAN'O has been designed to create a reliable anchoring point around a perimeter structure ranging from 50 cm to 10 meters



5m : NAR5  
10m : NAR10

### NAS / NASL

WEBBING SLING

EN 795 TYPE B

Light <-> 21 mm  
Strong <-> 30 mm



### FIXED ANCHOR POINTS

EN 795 TYPE A

NLDVALU12 | NPLAANC | NCLI100 | NCLI200

## PEGASO WORK

COMFORTABLE VENTILATED HELMET FOR INDUSTRIAL ENVIRONMENTS

EN 397

**PEGASO WORK** is a ventilated, comfortable work helmet designed to provide user protection against falling objects in industrial environments (working at heights, construction sites, etc.).

- SANITIZED® INTERNAL FABRIC
- EXTERNAL SHELL IN ABS
- VENTILATED HOLES WITH MESH
- EASY TURN 3D
- PRECISE ADJUSTMENT WHEEL
- LIGHTWEIGHT DESIGN 340G

REFERENCES

Orange Helmet	White Helmet	Visor	Earmuffs	Earmuffs adapters
NCAS019.025	NCAS019.001	NCAS021.119	NCAS024.019	NCAS026.019



VISOR      EARMUFFS      ADAPTERS



## TRANSPORT BAGS

Discover our range of dedicated bags designed to store your work equipment. Practical and secure solutions for efficiently transporting and storing your gear during your missions.



NSACNEW100 15 L      NSACTRA.NEO.N 35 L      NSACT35L.NEO 35 L      NSACBG27L 27 L      NSACBG40L 40 L      NSACET45L.NEO.N 45 L → 55 L + WATERPROOF BAG

## TOOLS TETHERING

Secure your tools during work at height with our range of fall protection equipment. A reliable solution to prevent object falls and ensure safety on construction sites.




NLG355      NLG362      NLG372      NLG363

## IN EACH CASE, ONE SOLUTION

NEOFEU load arresters consist in an efficient solution in many fields of applications to automatically arrest the fall of a load. They offer an additional protection in case of failure of the primary system intended to restraint or transport the loads. NEOFEU load arresters work on both static and moving loads through their automatic retracting cable. In case of failure and consecutive fall, the brake activates and locks the load on a short distance : less than 60 cm for **L** range and less than 1 m for **BIG** range.

Beyond a wide range of standard devices, we also study your specific configurations of loads to secure, dimensions and range of movements. We adapt to your workplace requirements and to the standards of your industry. Contact us.

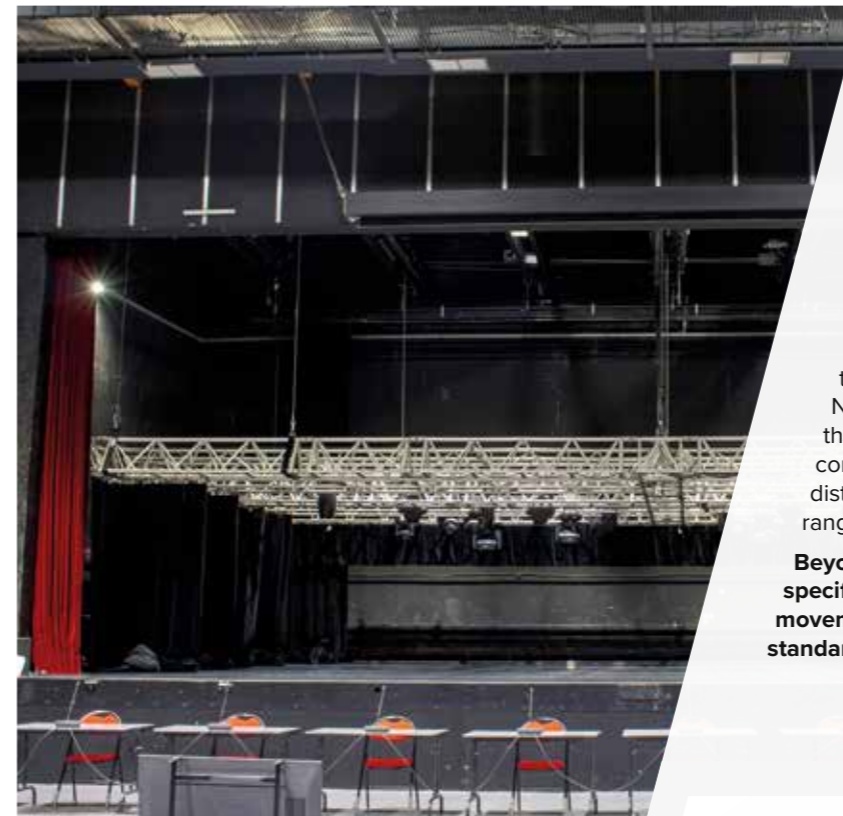

## BIG RANGE

Machinery Directive 2006/42/CE



VERSION 2

## L RANGE


Machinery Directive 2006/42/CE



+ CATAPHORESIS TREATMENT

UP TO 500 KG

GALVANIZED STEEL CABLE

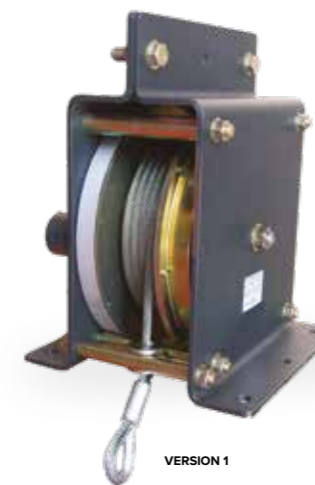

VERSION 1

UP TO 5 TONS

GALVANIZED STEEL CABLE

SPECIFIC CONFIGURATIONS

REFERENCES Go to our general catalog to view all available REFERENCES (models, maximum loads, dimensions, ...).



\* Cataphoresis refers to an anticorrosion treatment achieved through electrophoretic deposition.

# Fall Protection Only

## CUSTOMER SERVICE

Monitoring, advice, technical information, user manuals - our customer service will assist you throughout the entire **NEOFEU** range.

This service, located in **France**, is available to you from Monday to Friday, from 8:<sup>30</sup>AM to 5:<sup>30</sup>pm.



### BY PHONE

+33 (0) 4 78 48 75 33



### BY EMAIL

neofeu@neofeu.com

## GENERAL CATALOGUE

Go to our general catalogue and explore our full range of products and get all technical information.



**neofeu** )

### OFFICES AND PRODUCTION SITE

8 Allée de l'Industrie - Z.I R.Bloch - Chassagny  
F69700 Beauvallon France

Tel. : +33 (0) 4 78 48 75 33 - Fax : +33 (0) 4 78 48 77 45

neofeu@neofeu.com

neofeu.com

YOUR RESELLER