

NEO INOX

REF.
NEO120.INOX.K

RETRACTABLE TYPE FALL ARRESTER 12 M



MAX
140 KG TESTED FOR USE
UP TO 140 KG

 **12 M
STAINLESS STEEL
CABLE**




360° TOP SWIVEL

The swivel hook ensures an efficient anchorage and the correct position of the fall arrester.



SWIVEL + DROP INDICATOR

Fitted with a swivel connector with drop indicator, it follows all the moves of the user and ensure safety at a glance.

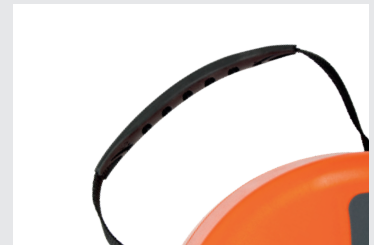

CARRYING HANDLE

To make it easy to carry **NEO INOX** is fitted with a transport handle made of textile and elastomer.



TECHNICAL SPECIFICATIONS

- Vertical use up to 140 kg
- 1 • Lanyard in stainless steel cable, 12m, Ø 5mm
- 2 • Composite housing PA Polyamid + fiber glass
 - Arrest force < 600 daN
 - Static resistance ≥ 12 kN
- 3 • Swivel anchor hook on top fitted with automatic twist lock connector in aluminum, opening 22 mm (*ref. NM20ALUB*)
- 4 • Automatic swivel connector on cable with fall indicator opening 28 mm in anodized aluminum (*ref. NM26ELFA*)
- 5 • Carry handle in textile and elastomer (not intended for anchorage)
- Weight : 5,4 kg

DESCRIPTION

The **NEO INOX** is a retractable type fall arrester fitted with a 12 m retractable stainless steel wire rope. User-friendly, it is equipped with a textile carrying handle to facilitate its transport. It has an integrated kinetic energy dissipating system and provides immediate locking (*see minimum clearance*) in case of a fall. It is designed for vertical use for a user and its equipment up to 140 kg.

USE

Works on height with vertical fall hazards.

TECHNICAL DATA

REFERENCES	CONNECTOR AT THE END OF THE LANYARD ④	LENGTH AT REST (with connector)	EXTENDED LENGTH (with connector)	MINIMUM CLEARANCE	
				Max user weight	Factor 1
MAIN REFERENCE NEO120.INOX.K	NM26ELFA	54 cm	12 m	140 kg	≥ 2,50 m
NEO120.INOX.X	NM28NET	60 cm			
NEO120.INOX.V	NM20ALUET	52 cm			
NEO120.INOX.F	NM18LFT	53 cm			

ON REQUEST

FT-NEO-INOX-GB-01-Rev22042024